



Analysis of rainfall in Pinheiro, Maranhão, Brazil: comparison between official data and measurements with a conventional rain gauge

Student Name(s): Anderson Diego da Silva Araújo¹, Sérgio Serra Silva¹, Emanuele Silva Costa¹, Mateus Gama Ribeiro¹, Efraim Ribeiro Correia¹, Laura Helenna Castro Ribeiro¹, Bruna Pereira Maia Silva¹, Breno José Nunes Soeiro¹, Henrique de Jesus Santos Feitosa¹

Teacher Name: Ana Maria Bender Seidenfuss das Neves², Aslei Andrade da Silva³, Aline Bessa Veloso³, Joel Artur Rodrigues Dias⁵, Yllana Ferreira Marinho⁵, Denise Rodrigues Santiago⁶, Hilton Costa Louzeiro⁴, Adilson Matheus Borges Machado⁵

- 1 – Estudantes de graduação em Engenharia de Pesca, Universidade Federal do Maranhão (UFMA), Campus Pinheiro, Estado do Maranhão, Brasil;
- 2 – Professora, Escola Centro Educa Mais Aquiles Batista, Alcântara, Estado do Maranhão, Brasil;
- 3 – Agência Espacial Brasileira (AEB), Brasil;
- 4 – Professor, Universidade Federal do Maranhão (UFMA), São Luís, Estado do Maranhão, Brasil;
- 5 – Professores, Universidade Federal do Maranhão (UFMA), Campus Pinheiro, Estado do Maranhão, Brasil;
- 6 – Doutoranda em Arquitetura e Urbanismo, Universidade Federal de Uberlândia, Estado de Minas Gerais, Brasil;

School Name: Universidade Federal do Maranhão

Country: Brazil

Date: 30/01/2026

Abstract



Rainfall is a climatic variable that plays a key role in understanding hydrological and environmental processes at the global scale. The analysis of historical precipitation time series is essential for identifying climate patterns, assessing the occurrence of extreme events, and supporting territorial planning and water resources management. The use of consistent observational and in situ data is indispensable for understanding climate dynamics and for validating predictive models. However, in Brazil, the low density of official meteorological stations limits the adequate representation of spatial and temporal precipitation variability. Therefore, this study analyzed precipitation variability in the municipality of Pinheiro, Maranhão, by comparing data obtained from a conventional rain gauge with records from automatic stations. Data were collected using an Incoterm 150 mm rain gauge installed at the Federal University of Maranhão, Pinheiro Campus. These data were compared with records from automatic stations operated by the National Water and Basic Sanitation Agency (ANA) to generate precipitation time series for the period from January to August 2025, following the protocols of the GLOBE Program. The results showed high daily precipitation variability, with an approximate mean of 9.1 mm day^{-1} , characterized by dry days interspersed with high-intensity rainfall events. The results also indicated greater agreement between the conventional rain gauge and the automatic stations.

Keywords: Rainfall measurement; Climate monitoring; Citizen science; Climate variability.

Research Problem

Considering the high variability of precipitation in the municipality of Pinheiro, Maranhão, and the limited coverage of official weather stations at the local level, this study aimed to investigate the reliability and applicability of different rainfall data sources for local climate monitoring. Accordingly, the study addresses the following research questions:

- How do precipitation data obtained from a conventional rain gauge compare with records from the automatic stations operated by the National Water and Basic Sanitation Agency (ANA)?
- How does the daily and seasonal variability of precipitation manifest in the municipality of Pinheiro, Maranhão?
- To what extent can local rainfall monitoring complement official climate observation networks?

Hypothesis

The conventional rain gauge, when properly installed and operated according to standardized protocols, produces reliable data that are comparable to records from automatic stations. It is further assumed that agreement between the datasets is higher when stations are



located under similar microclimatic conditions, making local monitoring an effective complementary tool for analyzing regional precipitation variability.

1. Introduction

The climate exhibits natural variability in time and space and is influenced by physical, biological, and anthropogenic factors, as well as by interactions among them. The analysis of historical climate time series allows the identification of trends and patterns that contribute to understanding regional climate dynamics and assessing risks associated with extreme events. According to Hersbach et al. (2020), consistent observational data are essential for understanding climate processes and validating predictive models, highlighting the need for structured monitoring programs. In this context, precipitation stands out as one of the most relevant meteorological variables for hydrological, environmental, and territorial planning studies.

Precipitation monitoring is essential for water resource management, urban planning, and flood risk mitigation, especially in regions with high socio-environmental vulnerability (Weng et al., 2017; Cardozo et al., 2021). In urban areas, the presence of impervious surfaces intensifies surface runoff, increasing the frequency and magnitude of floods and inundations, phenomena that are becoming more recurrent due to climate change and unplanned urban expansion (Brase et al., 2024; IPCC, 2022). Urbanization and changes in land use and land cover are associated with an increased risk of disasters linked to extreme precipitation events, such as floods and inundations, due to alterations in natural runoff conditions and increased exposure of populations and infrastructure (Salgueiro et al., 2024).

Despite its importance, obtaining accurate rainfall data remains a challenge in many regions, especially at the local level. Estimates based on temporal averages and spatial interpolations do not always capture the actual variability of precipitation, making hydrological modeling and the forecasting of extreme events difficult. Therefore, consistent time series obtained through well-structured data collection programs are essential for reliable analysis and for understanding the complexity of hydrological systems (Zarekarizi et al., 2018).



In this context, the GLOBE (Global Learning and Observations to Benefit the Environment) program plays an important role. The GLOBE program is an international science and environmental education program that involves students, teachers, scientists, and citizens in the collection of standardized environmental data and the development of scientific investigations, contributing to the understanding of environmental phenomena at local, regional, and global scales (AEB, 2022). By promoting active community participation in the production of quality data, GLOBE expands the observational base available for climate and hydrological studies and strengthens citizen science as a tool for environmental education and for integrating science and society.

Rainfall is a fundamental atmospheric variable for climate and environmental studies, as it directly influences natural processes and human activities. Its variability, both at local and regional scales, reinforces the need for continuous monitoring, especially in areas subject to impacts resulting from excess or scarcity of rainfall (Anjos et al., 2020). Long-term studies, such as flood simulations and hydraulic infrastructure design, depend on reliable historical precipitation series (Mateus, 2006; Paz, 2010).

The use of conventional rain gauges is a viable alternative for collecting rainfall data at the local scale, especially in contexts where the official monitoring network is limited. In addition to providing relevant data, participatory monitoring contributes to scientific training, community awareness, and the strengthening of citizen science, broadening the understanding of the local climate and supporting public adaptation and mitigation policies. In this sense, the present study aims to statistically analyze precipitation in the municipality of Pinheiro, Maranhão, by comparing official data with measurements obtained from conventional rain gauges, in order to deepen the understanding of local climate variability.

2. Methods and materials


2.1 Study area

The study area is located in the municipality of Pinheiro (Figure 1), within the Baixada Maranhense microregion, and is characterized by climatic conditions typical of tropical regions, with a hot and humid tropical climate classified as Aw according to the Köppen–Geiger system (Lima et al.,



2024). This climatic pattern, predominant in the state of Maranhão, is characterized by high temperatures throughout the year and pronounced rainfall seasonality, with the highest precipitation occurring in the first months of the year and a reduction in rainfall during the second half of the year.

Figure 1 –Location of the study area in Pinheiro, Baixada Maranhense, Maranhão, Brazil. Estações ANA Pinheiro e ANA Pimenta.

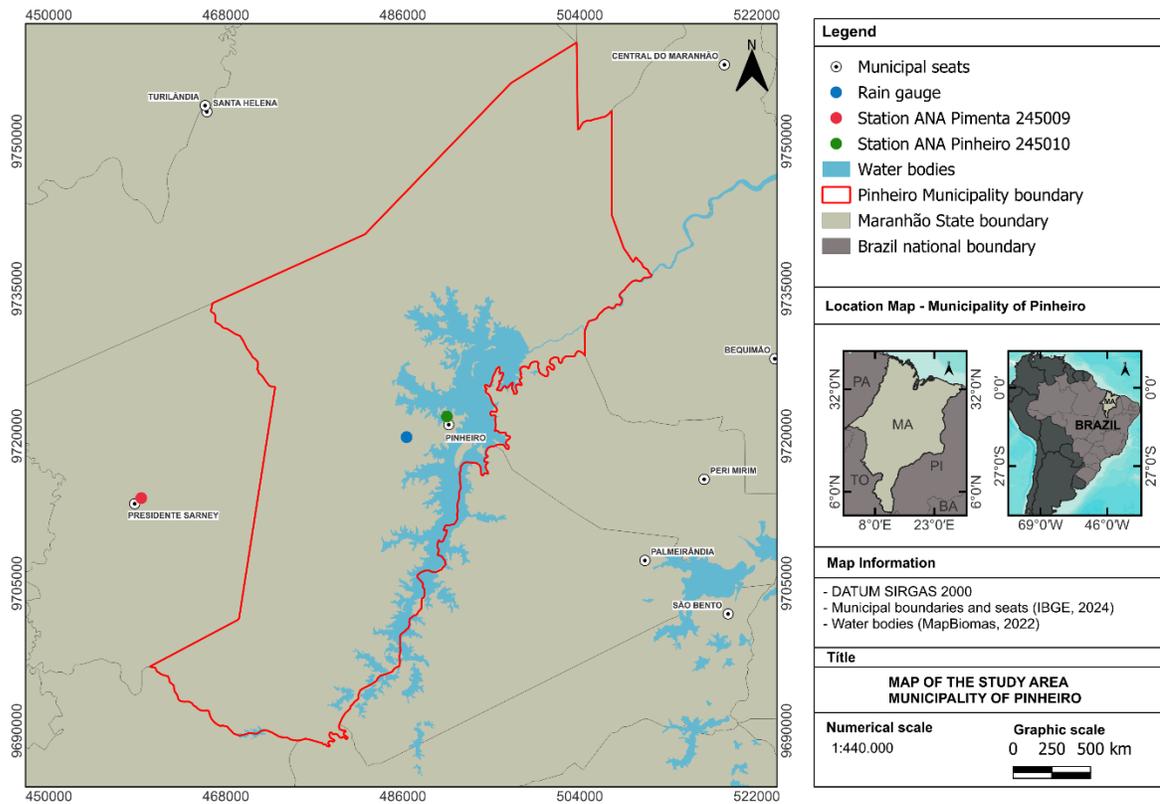

Source: Author’s own elaboration.

In spatial terms, Pinheiro is located at 2°31'16" S and 45°04'22" W, with an average altitude of approximately 8 m above sea level and a territorial area of 1,465.597 km² (IBGE, 2022). Within the environmental context of the Baixada Maranhense, the municipality is part of a region with average annual temperatures ranging from 25 °C to 26.5 °C and annual rainfall between 1,700 mm and 1,900 mm. These conditions favor the development of open fields, floodplain forests, and periodically flooded areas, which are characteristic elements of regional floodplains (Araújo et al., 2019).




2.2 Data and methods

The GLOBE protocols are part of an international science and education initiative that integrates students, teachers, scientists, and citizens in the systematic collection and analysis of environmental data. In this study, protocols from the Atmosphere Sphere were adopted, with emphasis on the Precipitation Protocol, which establishes specific guidelines for the measurement, recording, and validation of rainfall data, ensuring methodological standardization and comparability of results across different spatial and temporal scales.

Based on these protocols, precipitation monitoring was conducted from January to August using a conventional rain gauge (Incoterm, 150 mm model) installed at the Federal University of Maranhão, Pinheiro Campus (Figure 2). The instrument was positioned 1.5 m above the ground, with the orifice located 5 cm above the mounting rod and approximately 50 cm from the buried support structure, ensuring greater stability. The installation site was selected to minimize interference from wind and physical obstacles, and the instrument was carefully leveled to ensure accurate and representative measurements of local precipitation.

Figura 2 – (a) e (b) Instalação do pluviômetro; (c) e (d) Leitura da precipitação acumulada




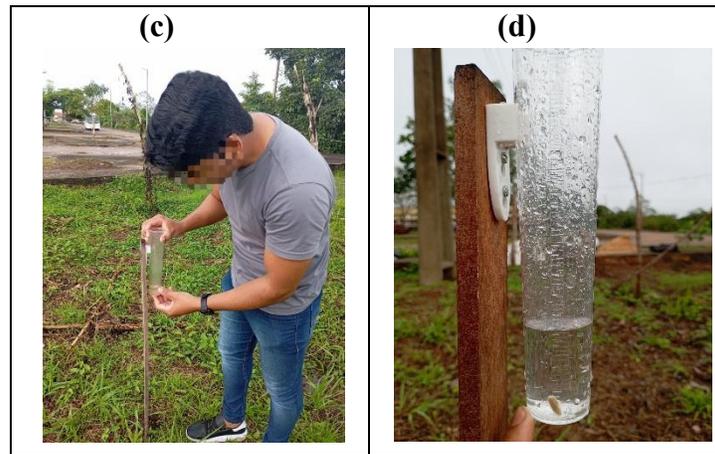

Source: Author's own elaboration.

The methodological workflow adopted in this study (Figure 3) included the collection, organization, and analysis of rainfall data, ensuring that each step followed a logical and clear sequence. Data collection was conducted directly in the field following standardized observation procedures, and the records obtained were subsequently organized and stored in an application developed specifically for this purpose, ensuring the reliability and consistency of the generated database.

Figure 3 – Methodological workflow.

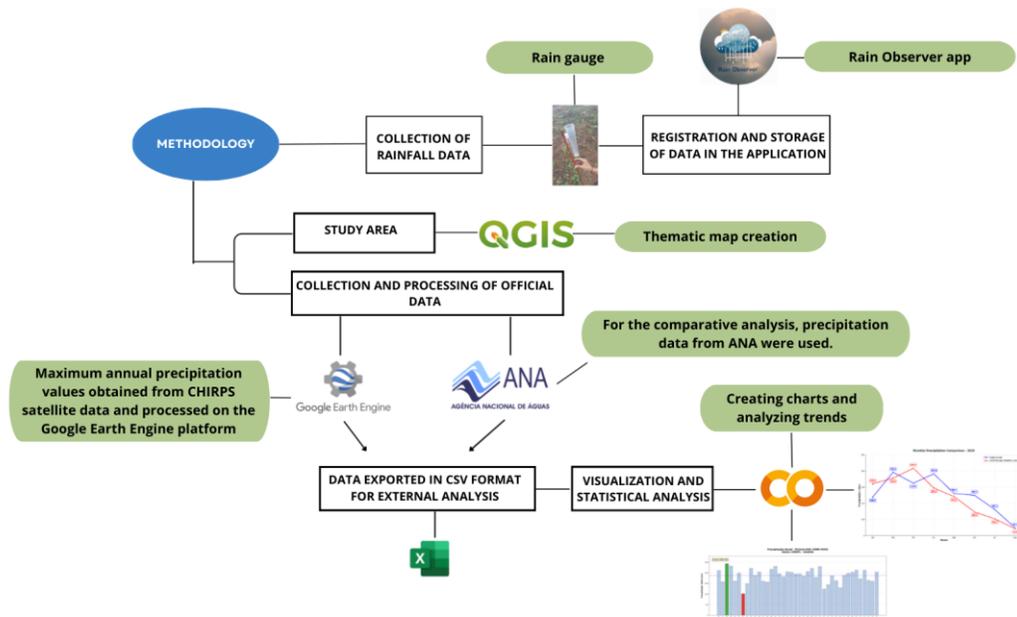

Source: Author's own elaboration.



At the same time, QGIS software, widely used in geospatial analysis and environmental studies, was employed to map the study area and spatially represent the rainfall monitoring point. The application of this geographic information system enabled the processing, organization, and visualization of cartographic data, contributing to the adequate spatial contextualization of the study area and the precise location of the rainfall data collection point.

For the comparative analysis, historical precipitation time series were obtained from the National Water and Basic Sanitation Agency (ANA), referring to the most representative rainfall station in the study area. These data were organized to ensure temporal compatibility with the records obtained from the rain gauge installed in the field, allowing comparative statistical analyses to be performed.


All graphs presented in this study were generated in the Google Colab environment using the Python programming language, where rainfall data were processed, analyzed, and visualized in an integrated manner. This approach enabled the production of accurate and consistent graphical representations, facilitating the interpretation of the spatial and temporal variability of precipitation over the analyzed period.

3. Results and data

The graph of average daily precipitation recorded by the Incoterm rain gauge (Figure 4) shows marked variability in rainfall values over the analyzed period, with an approximate mean of 9.1 mm day^{-1} . This pattern indicates the predominance of numerous days without rainfall or with negligible precipitation, interspersed with a few rainfall events. The highest accumulations occurred between January and April, a period corresponding to the regional rainfall peak and accounting for a substantial portion of the annual total. In May and June, rainfall was still observed, although with reduced frequency and intensity. From July onward, a decline in precipitation was observed, with a predominance of dry days, particularly in July and August.



Figure 4. Daily mean precipitation recorded by the rain gauge.

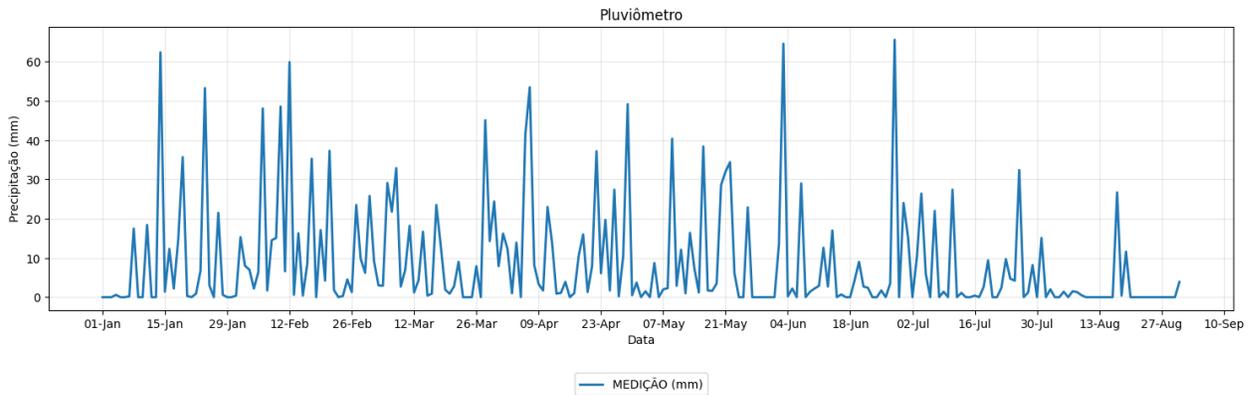

Source: Author's own elaboration.


The monthly comparative analysis between the conventional rain gauge and the ANA Pimenta Automatic Station (Figure 5) reveals a notable pattern of variation throughout 2025. In the first three months (January to March), the station consistently recorded higher precipitation totals, particularly in March, when it registered 416.2 mm compared to 324.0 mm from the rain gauge, a difference of 92.2 mm, representing a 22.2% higher value. January also showed a significant discrepancy, with the station recording 320.1 mm compared to 238.1 mm from the rain gauge.

From April onward, a reversal in the recording pattern was observed, with the rain gauge systematically reporting higher values than the automatic station. In April, a difference of 87.5 mm was observed, with a higher volume recorded by the ANA Pimenta station compared to the rain gauge installed at UFMA. However, the greatest divergence occurred in June, with 249.2 mm recorded by the rain gauge and only 146.5 mm at the station, resulting in an absolute difference of 102.7 mm, equivalent to a 70.1% higher value. In July, this trend continued, with the rain gauge recording 56.1% more precipitation.

This seasonal variation in the discrepancy pattern indicates the influence of climatic, instrumental, and methodological factors, as well as the spatial separation between the monitoring points, affecting measurements differently throughout the annual hydrological cycle.




Figure 5. Análise comparativa dos dados de precipitação obtidos por um pluviômetro convencional e pela Estação ANA Pimenta (245009).

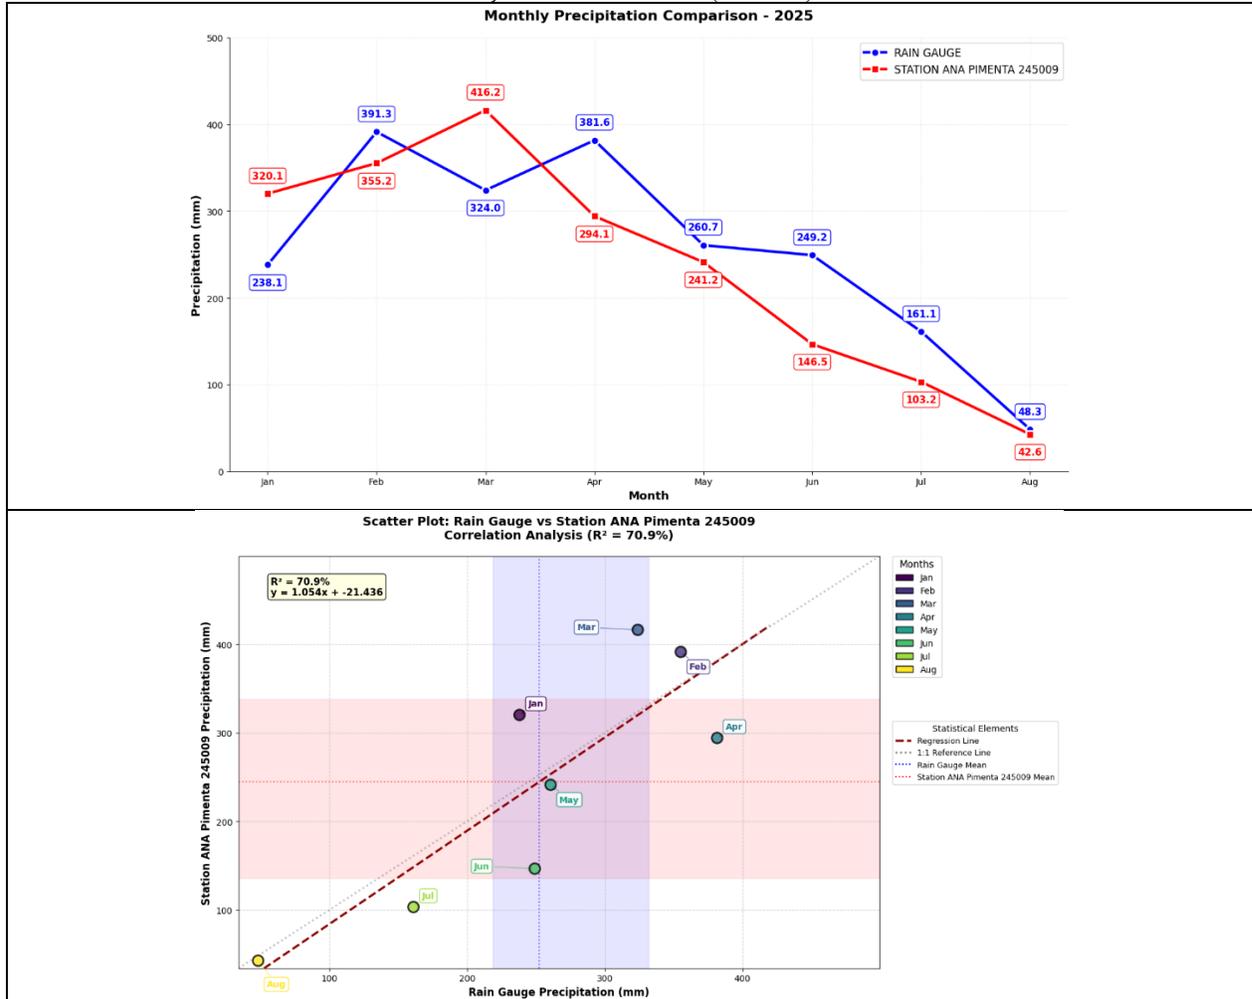

Source: Author's own elaboration.

The comparison between the records from the conventional rain gauge and the ANA Pinheiro Automatic Station (Figure 6) shows high agreement throughout the analyzed period. Both datasets consistently reproduce the seasonal pattern of precipitation in the region, with higher volumes concentrated in the rainiest months and a progressive reduction in the subsequent months. The observed monthly differences remain relatively low and homogeneous, with no significant discrepancies in specific months. This similarity suggests that the rain gauge and the ANA Pinheiro Station are influenced by similar microclimatic conditions, due to the short distance between the monitoring sites.

Figure 6. Análise comparativa dos dados de precipitação obtidos por um pluviômetro convencional e pela Estação ANA Pinheiro (245010).

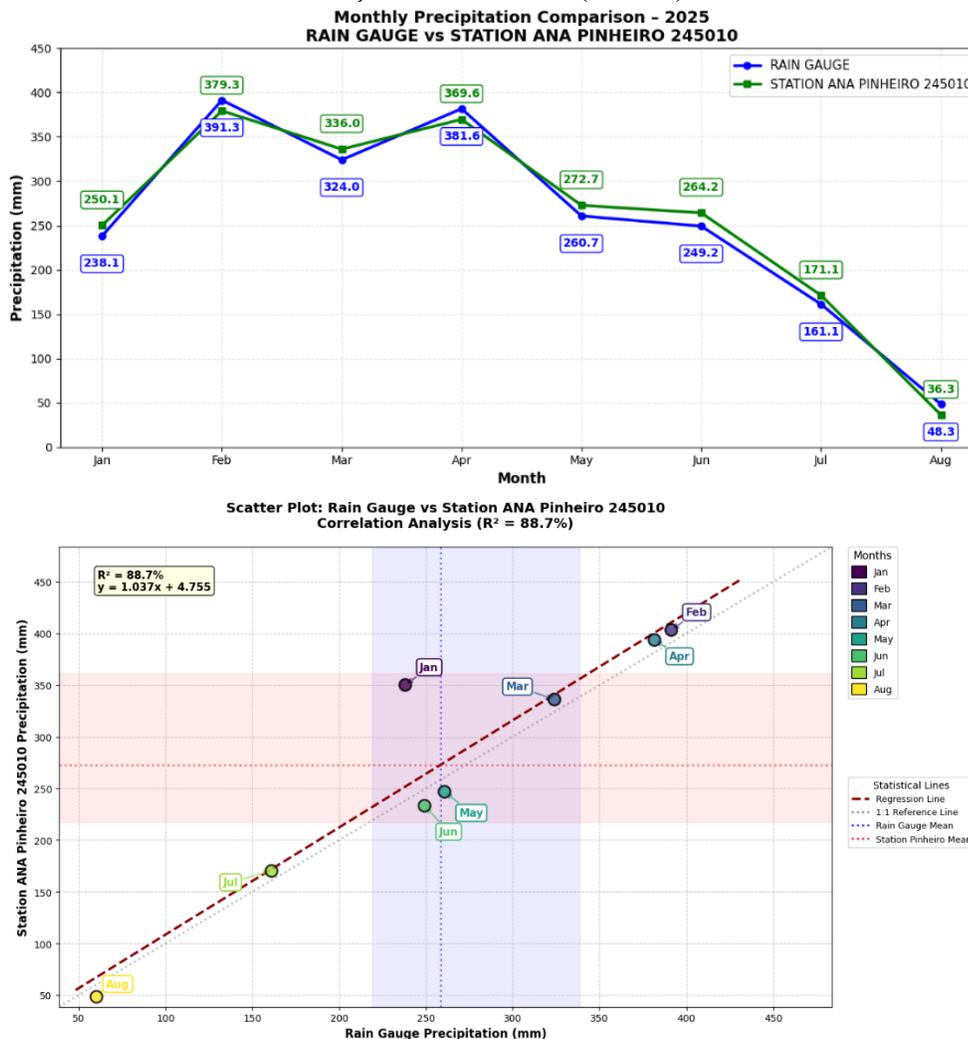

Source: Author's own elaboration.

The compatibility between the homemade rain gauge installed at UFMA and the ANA Pinheiro Station indicates similar calibration and sensitivity characteristics. Even during months with the lowest precipitation, consistency between the records is maintained. The absence of systematic deviations throughout the time series reinforces the reliability of the data obtained. Thus, the results demonstrate that the rain gauge measurements show high consistency when compared with the ANA Pinheiro Station. This agreement strengthens the validity of using these data for rainfall monitoring and analysis in the study area.



4. Discussion

The variation in average daily precipitation observed in Figure 5 is consistent with the typical behavior of humid tropical regions, where short-duration, high-intensity rainfall events predominate. According to the World Meteorological Organization, daily precipitation shows strong spatial and temporal heterogeneity, even in geographically close areas, which limits the representativeness of point measurements and requires caution in interpreting this type of data (WMO, 2022). Thus, the pattern identified in this study reflects the intermittent nature of rainfall, without indicating anomalies in the local rainfall regime.

As highlighted by the Intergovernmental Panel on Climate Change (IPCC), annual fluctuations in total precipitation are associated with natural climate variability, resulting from the interaction between large-scale atmospheric and oceanic systems (IPCC, 2021). Thus, the analysis of extensive historical series is essential for a correct understanding of regional climate behavior and to avoid interpretations based on short periods.

The differences identified in the comparison between local rain gauge data and ANA Pimenta station data, as illustrated in Figure 4, can be explained by the high spatial variability of precipitation, especially in environments dominated by convective rainfall. Studies show that the correlation between rainfall records decreases significantly with increasing distance between stations, even at small spatial scales, reflecting the highly localized nature of rainfall events (Ochoa-Rodríguez et al., 2015). In this sense, occasional discrepancies between series do not necessarily indicate inconsistencies in the data, but rather the influence of spatial and environmental factors.

In contrast, the greater agreement observed between the local rain gauge and ANA Pinheiro station records, shown in Figure 6, highlights the importance of spatial proximity and similarity of physiographic conditions for the consistency of rainfall measurements. According to technical guidelines from the National Water and Basic Sanitation Agency, stations located in similar environmental contexts tend to show greater consistency in the totals recorded, especially when operated under standardized observation protocols (ANA, 2020). This result reinforces the reliability of local monitoring as a complement to official hydrometeorological observation networks.



5. Conclusion

The implementation of the GLOBE protocols for rainfall monitoring in Pinheiro, Maranhão, proved to be a viable tool for producing local precipitation data. The results revealed the spatiotemporal variability characteristic of the Baixada Maranhense region, with rainfall concentrated in intense events between January and April and significant interannual variation.

The comparison between the conventional rain gauge and the ANA automatic stations revealed different levels of agreement, with the highest agreement observed for the Pinheiro 245010 station. This suggests that factors such as geographical proximity and similar microclimatic conditions are decisive for data consistency, reinforcing the importance of methodological standardization.

This initiative validated citizen science as an essential complement to official monitoring networks, especially in regions with limited coverage. In addition to generating relevant data for water planning and climate risk management, the program promoted environmental education and community engagement. Therefore, the integration of participatory methodologies such as GLOBE with official and remote sensing data represents an effective strategy for improving the understanding of regional climate variability and supporting public adaptation policies in the Amazon region of Maranhão.

6. Citations

Agência Espacial Brasileira. (2022). *Education and citizen science programs in Brazil: The GLOBE case*. Brasília, Brazil. <https://www.gov.br/aeb>

Agência Nacional de Águas e Saneamento Básico. (2020). *Manual de procedimentos de observação hidrometeorológica*. ANA.

Anjos, R. S., Wanderley, L. S. P., & Nóbrega, R. S. (2020). Spatial–temporal distribution of rainfall in the state of Paraíba, Brazil: Variability and socio–environmental impacts. In R. S. Nóbrega (Ed.), *Applied climatology in the Brazilian semiarid region: Methods, techniques, and case studies* (pp. 67–89). CCTA/UFPB.

Araújo, E. C. E., Sousa, V. F., & Ferreira, J. D. M. (2019). *Edaphoclimatic characteristics of the Baixada Maranhense*. In V. F. Sousa et al. (Eds.), *Technologies for agricultural production in the Baixada Maranhense* (pp. xx–xx). Embrapa Cocais.



Brase, L., Thompson, M., Davis, K., & Johnson, R. (2024). Rain gardens and rain gauges: Students get hands on with data while evaluating green infrastructure at their school. *The Science Teacher*, 91(3), 28–37.

Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., Peubey, C., Radu, R., Schepers, D., Simmons, A., Soci, C., Abdalla, S., Abellan, X., Balsamo, G., Bechtold, P., Biavati, G., Bidlot, J., Bonavita, M., ... Thépaut, J.-N. (2020). The ERA5 global reanalysis. *Quarterly Journal of the Royal Meteorological Society*, 146(730), 1999–2049. <https://doi.org/10.1002/qj.3803>

Intergovernmental Panel on Climate Change. (2021). *Climate Change 2021: The Physical Science Basis*. Cambridge University Press. <https://doi.org/10.1017/9781009157896>

Intergovernmental Panel on Climate Change. (2022). *Climate change 2022: Impacts, adaptation, and vulnerability*. Cambridge University Press. <https://doi.org/10.1017/9781009325844>

Lima, R. F., et al. (2024). Evaluation of the Köppen–Geiger climate classification in Brazil under recent climate variability scenarios. *Brazilian Journal of Meteorology*.

Mateus, R. S. (2006). *Hydrological modeling of the Guarapiranga reservoir watershed* (Master's thesis, University of São Paulo). USP Repository, Brazil.

Ochoa-Rodríguez, S., Wang, L.-P., Gires, A., Pina, R. D., Reinoso-Rondinel, R., Bruni, G., Ichiba, A., Gaitan, S., Cristiano, E., & Asselborn, S. (2015). Impact of spatial and temporal resolution of rainfall inputs on urban hydrodynamic modelling outputs: A multi-catchment investigation. *Journal of Hydrology*, 531, 389–407. <https://doi.org/10.1016/j.jhydrol.2015.05.035>

Paz, A. R. (2010). *Hydrological simulation of rivers with large floodplains* (Doctoral dissertation, Federal University of Rio Grande do Sul). Lume Digital Repository, Brazil.

Salgueiro, C. O. de B., Coutinho Rodrigues Junior, J., Borja Gonçalves Gomes de Menezes, R., Paiva, A. L. R., Oliveira, L. M. de, & Melo dos Santos, S. (2024). Urbanização e eventos pluviométricos: avaliação do impacto na ocorrência de desastres naturais. *Revista Brasileira de Geografia Física*, 17(6), 4029–4043. <https://doi.org/10.26848/rbgf.v17.6.p4029-4043>

Segovia-Cardozo, D. A., Rodríguez-Sinobas, L., Díez-Herrero, A., Zubeizu, S., & Canales-Ide, F. (2021). Understanding mechanical biases of tipping-bucket rain gauges: A semi-analytical calibration approach. *Water*, 13(16), 2285. <https://doi.org/10.3390/w13162285>

Weng, S., Zhai, D., Yang, X., & Hu, X. (2017, January 23–25). A ZigBee wireless network for remote sensing applications in hydrological monitoring systems. In *Proceedings of the Seventh International Conference on Electronics and Information Engineering* (Vol. 10322, pp. 442–450). Nanjing, China.



World Meteorological Organization. (2022). *Guide to hydrological practices* (WMO-No. 168). WMO.

Zarekarizi, M., Rana, A., & Moradkhani, H. (2018). Precipitation extremes and their relation to climatic indices in the Pacific Northwest USA. *Climate Dynamics*, 50(11–12), 4519–4537.

7. Badges

	<p>The project involved the collection and organization of rainfall data in the municipality of Pinheiro, Maranhão, obtained through daily field measurements using a rain gauge, following standardized observation procedures. These records enabled the construction of a structured database on precipitation variability in the study area.</p> <p>The data were analyzed to identify temporal rainfall patterns in the region, allowing the interpretation of the local rainfall regime. Considering the limitations of the collection period and the spatial scale of the measurements, the study demonstrated the systematic application of environmental monitoring methods to understand Earth system phenomena at the local scale.</p>
	<p>The research was developed with the participation of undergraduate students from the Federal University of Maranhão, who collaborated in local rainfall monitoring, data organization, and comparative analysis between different sources of climate information. The application of standardized GLOBE Atmosphere protocols allowed the collection of consistent records at the local scale, highlighting the potential of participatory monitoring as a complement to official observation networks. In addition to contributing to the understanding of the spatiotemporal variability of precipitation in the municipality of Pinheiro, the initiative strengthened scientific collaboration and demonstrated the relevance of citizen science as a tool to support environmental planning and water resource management in the region.</p>



	<p>The project arose from the need to understand precipitation variability in the municipality of Pinheiro, Maranhão, given the scarcity of systematic rainfall data at the local scale. This context highlighted the importance of continuous rainfall monitoring, establishing links between a specific territorial demand and broader challenges related to climate monitoring, water resource management, and the occurrence of extreme events.</p> <p>The initiative contributed to strengthening environmental monitoring by demonstrating that locally collected rainfall data, obtained in a systematic and standardized manner, can be organized into a structured and reliable database that complements official datasets. In addition to expanding the availability of climate information for the municipality, the results provide support for territorial planning and water management, while promoting student engagement in citizen science practices and strengthening scientific and socio-environmental education, with impacts at local and regional scales.</p>
--	--